


D19/SD19 SERIES



The thirst quenchers!™

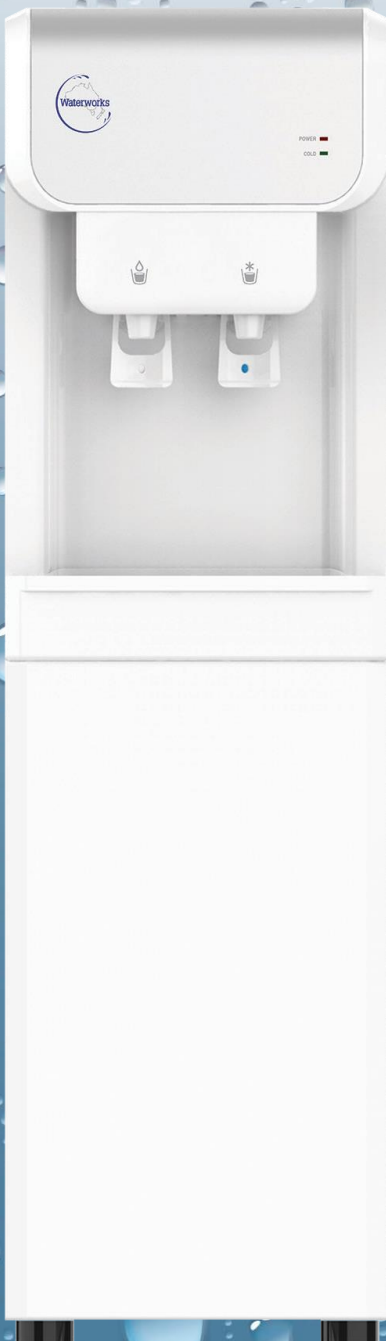

- ✓ Stylish high gloss white & stainless look cabinet
- ✓ Available in Hot/Cold or Cool/Cold
- ✓ Hygienic push taps
- ✓ 3.3 litre stainless steel cold tank
- ✓ Available in White & Black
- ✓ Connects to mains water supply
- ✓ Compatible with most Inline Filter Systems
- ✓ Access plate on the side of SD19C
- ✓ 36 Month Comprehensive Warranty



**PROVEN QUALITY &
PERFORMANCE
FOR OVER 20 YEARS**



D19/SD19 SERIES

GENERAL FEATURES

With its high gloss front, brushed steel sides and stylish slim design, the D19 series cooler is perfect for any home or office.

COLD TANK: 3.3 litre type 304 stainless steel for superior chilling. The highly polished surface is easy to clean and maintain.

HOT TANK: 1.8 litre type 304 stainless steel with 500 watt sheathed heater ensures temperature control. On/off switch is easily accessible at the back of the unit.

CABINET: White high gloss front with brushed steel silver sides. The top and front panels are moulded ABS plastic, the side panels are high polymer coated steel.

TAPS: NSF approved and hygienic durable polypropylene push taps with self-closing design and fast flow. Hot safety tap comes as standard on hot/cold model.

FLOAT ASSEMBLY: Dual float system maintains the water level and shuts off when full.

TWIST & TURN TWIN FILTRATION

SEDIMENT CARTRIDGE

- Flow rate 2L per minute
- 5 Micron Polypropylene pre filter for the removal of dirt sediment, rust and particles.
- Filter replacement - 1900L or 6 months. Which ever occurs first.



CARBON BLOCK

- 5 Micron Silver impregnated carbon block for chemical, taste and odour removal.
- Flow rate 2L per minute
- Filter replacement - 1900L or 6 months. Which ever occurs first

TRIPLE FILTRATION OPTION ALSO AVAILABLE



Waterworks™ Australia

ABN 91 902 793 936

48-50 Neumann Road Capalaba Queensland 4157

Bulk Warehouse: 53 Neumann Road Capalaba Queensland 4157

SPECIFICATIONS

REFRIGERATION: Gas R134A. The refrigerant flow is controlled by a capillary tube which has no moving parts. The compressor is hermetically sealed with an automatic overload protector. Lubricant is not needed.

ELECTRICAL: Certificate number 160793. 220v 50hz single phase. A 1.5 metre power cord is supplied. Full load current is 1.2 amps.

CONDENSER: Quietly operating, air cooled with no moving parts.

PERFORMANCE

Tap 1 Approx. 4-10° C
Tap 2 Room Temperature
Hot tap Approx. 84-89° C

ROOM TEMP °C	21	27	32
150ML CUPS/HR 10°C	22	17	13
LITRES/HR AT 10°C	3.2	2.6	2
HOT WATER DELIVERY: 15 x 170ml cups per hour			

*Intermittent use only, continuous use will result in reduced performance.

SHIPPING WEIGHTS & DIMENSIONS

MODEL	WEIGHT	MODEL	WEIGHT	WIDTH	DEPTH	HEIGHT
D19C	17kg	D19CH	19kg	29cm	34cm	100cm
SD19C	16kg	SD19CH	18kg	29cm	51cm	53cm

INSTALLATION

To be installed in accordance with local plumbing laws. Failure to install a certified Pressure Limiting Valve will void warranty

WARRANTY

The Waterworks™ D19 series is covered by our 36 month Comprehensive Warranty (copy available on request). The warranty provides comprehensive parts and labour coverage for the period of 36 months from the date of original sale.

Distributed by...

Awesome Water Mackay

Tel 0401 441 291

info@awesomeatermackay.com

www.awesomewatermackay.com



Phone (07) 3390 3777

Email sales@waterworksaustralia.com

www.waterworksaustralia.com